



Fruehauf Combo Flatbeds offer extreme strength, long term durability and unmatched quality; light weight enables operators to maximize payloads and profits while increasing fuel efficiency

Composition	Combination
Suspension	Air ride
Overall length	53 ft
Overall width	102 in
Number of rear axles	Tandem
Axle type	Fixed Spread
Floor type	Aluminum / Apitong

53' COMBO FLATBED







100 YEARS INNOVATING FOR YOU Custom-Built | Safety | Strength | Superior Quality

53' COMBO FLATBED

MODEL: PA-HT2-53W

BODY STRUCTURE

GENERAL SPECIFICATIONS

- Main Beams: Fabricated "I" beam, 3/8" X 6" Strenx 110 XF or high tensile strength steel G100 top and 1/2" X 4" Strenx 110 XF or high tensile strength steel G100 bottom flange welded to 3/16" web
- Kingpin Location: 36"
- Crossmembers: 4" high strength steel "I" beam located on 16" centers
- Floor: Extruded aluminum with (4) Apitong Nailer boards
- Side Rail: 6061-T6 extruded aluminum
- Rub Rail: 6061-T6 extruded aluminum
- Pipe Spools: Between each stake
- Knee Braces: 1 1/2" pipe
- Mud Flaps: (4) hard rubber 24" X 30"
- · Tire Carrier: Single basket

- Suspension: Air ride
- Axles: Fixed spread; capacity 25,000 lb
- Brake System: Bendix ABS system, 2S/1M with PLC
- Wheels: Steel / aluminum
- Tires: 24.5 / 22.5
- Landing Gear: Holland Atlas 55,000
- Electrical Lights And Wiring: Grote, meeting FMVSS-108
- Paint: All steel parts primed and painted with polyurethane
- · Winches: (10) sliding
- · Winch Track: Extruded aluminum channel

ADDITIONAL OPTIONS

MISCELLANEOUS

- Overall length options: 40 ft 53 ft
- Composition options: combo or steel
- Tire inflation system
- Fixed winches

MISCELLANEOUS


- Twist locks 4, 8 or 12
- Grain flatbed
- Bulkhead
- Other

FLOORING

· Diamond pattern steel plate

SUSPENSION

· Spring suspension

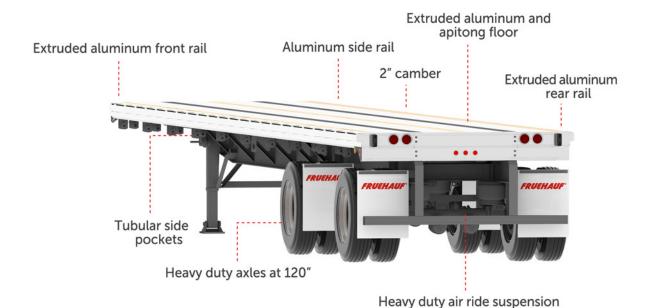

FRUEHAUF equipment is designed to provide real hauling solutions