


FRUEHAUF®

Custom-Built | Safety | Strength | Superior Quality

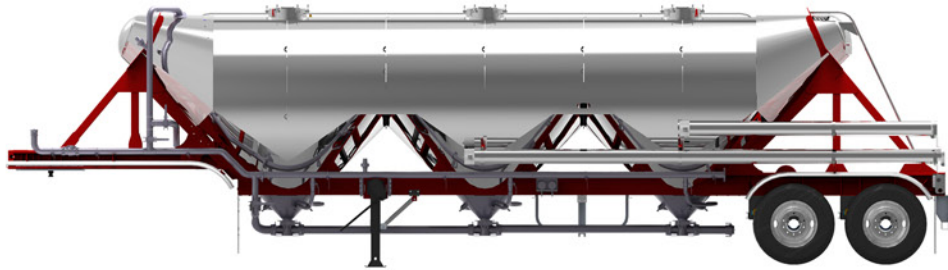


Fruehauf is well known for its long lasting tanks that provide extreme strength and durability for the long haul with exceptional structural integrity, aerodynamics and load capacity

Our Aluminum Pneumatic Dry Bulk Tanks are now available with lighter-weight aluminum elements, to increase load capacity and fuel efficiency

Composition	Aluminum
Suspension	Air ride
Overall length	42 ft
Overall width	96 ft
Overall height	11 ft 5 in
Number of rear axles	Tandem
Axle type	Fixed
Compartments	3
Capacity	1,040 cu ft

ALUMINUM PNEUMATIC DRY BULK TANK

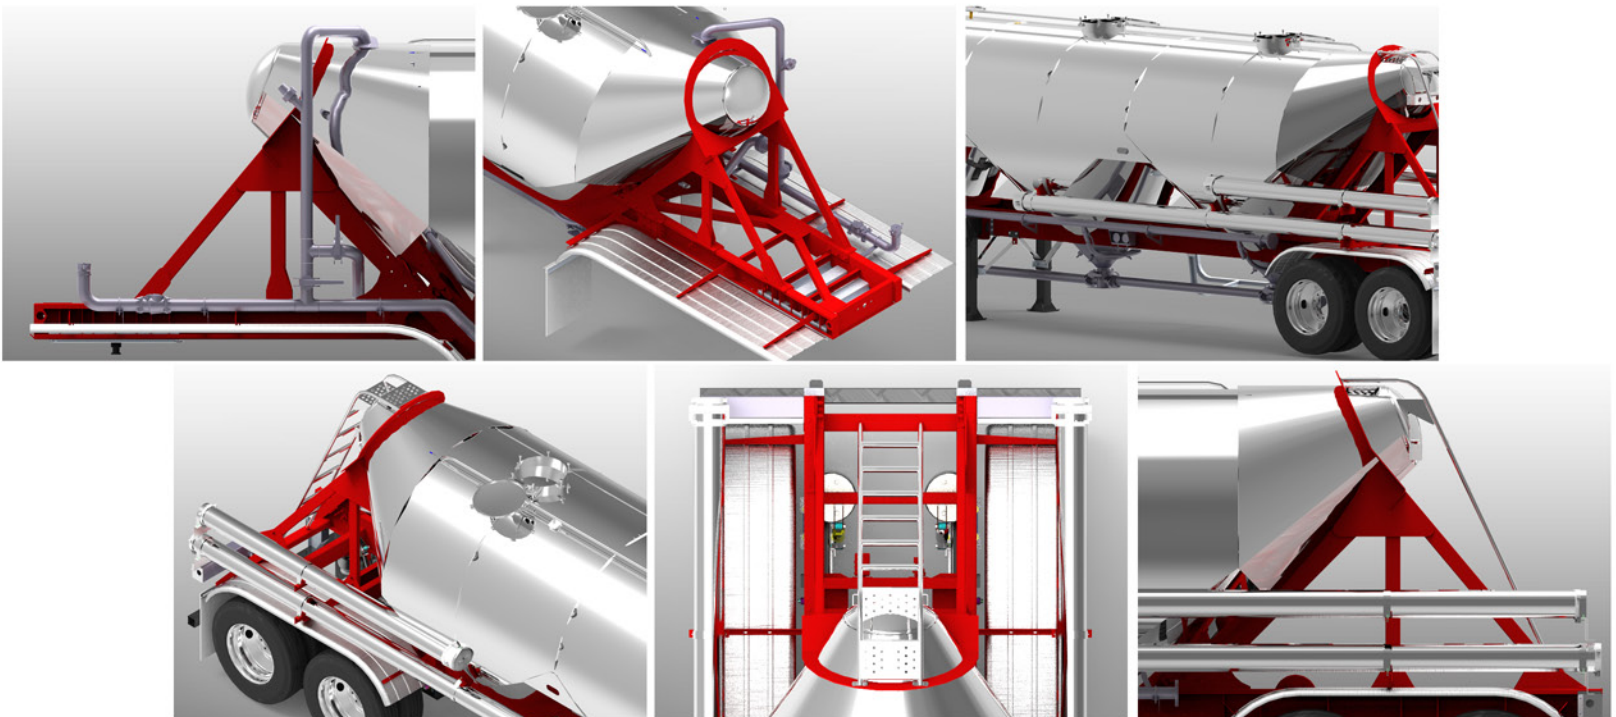

100 YEARS

INNOVATING FOR YOU

Custom-Built | Safety | Strength | Superior Quality

Toll-free 1.844.891.7729 | sales@fruehauf.mx | +52 (55) 5898.7800 | www.fruehauf.mx

ALUMINUM PNEUMATIC DRY BULK TANK

MODEL: HAB-HT2-J1040N

BODY STRUCTURE

- **Tank:** Smooth exterior, aluminum 5454-H32 gauge 1/4", with standard finish
- **Hoppers:** (3) conical at 45° slope
- **Manholes:** (3) Knappco 20" with 6 hold down
- **Front and Rear Frame:** High tensile strength steel
- **Ladder:** Aluminum, mounted at the center rear over the chassis frame
- **Air Line Inlet:** 3" aluminum on curbside
- **Product Valve:** 6" butterfly valve on each hopper
- **Tees:** BTI 6 X 4 cast aluminum
- **Aeration:** (3) aerators per hopper
- **Product Line:** 4" schedule 40 aluminum line between hoppers
- **Pressure Relief Valves:** Mounted on blowdown line
- **Gauges:** (2) liquid filled, one tank pressure, one line pressure
- **Hose Carrier:** 8" aluminum tube mounted curbside with cast aluminum door
- **Tire Carrier:** Single basket
- **Fender:** Aluminum, rear and front
- **Mud Flaps:** (2) hard rubber 24" X 30"

GENERAL SPECIFICATIONS

- **Suspension:** Air ride
- **Axles:** (2) Hendrickson 25,000 lb
- **Wheels:** Aluminum
- **Tires:** 24.5 / 22.5
- **Landing Gear:** Holland, Atlas 55,000
- **Brake System:** ABS 2S/1M
- **Light System:** Meeting FMVSS-108

ADDITIONAL OPTIONS

MISCELLANEOUS


- Tire inflation system
- Double tire carrier
- Preparation for blower
- Rollover prevention ABS braking system discharges
- Gravity
- Food grade
- Other

AXLES

- 30,000 lb capacity
- Retractable

SUSPENSION

- Spring suspension

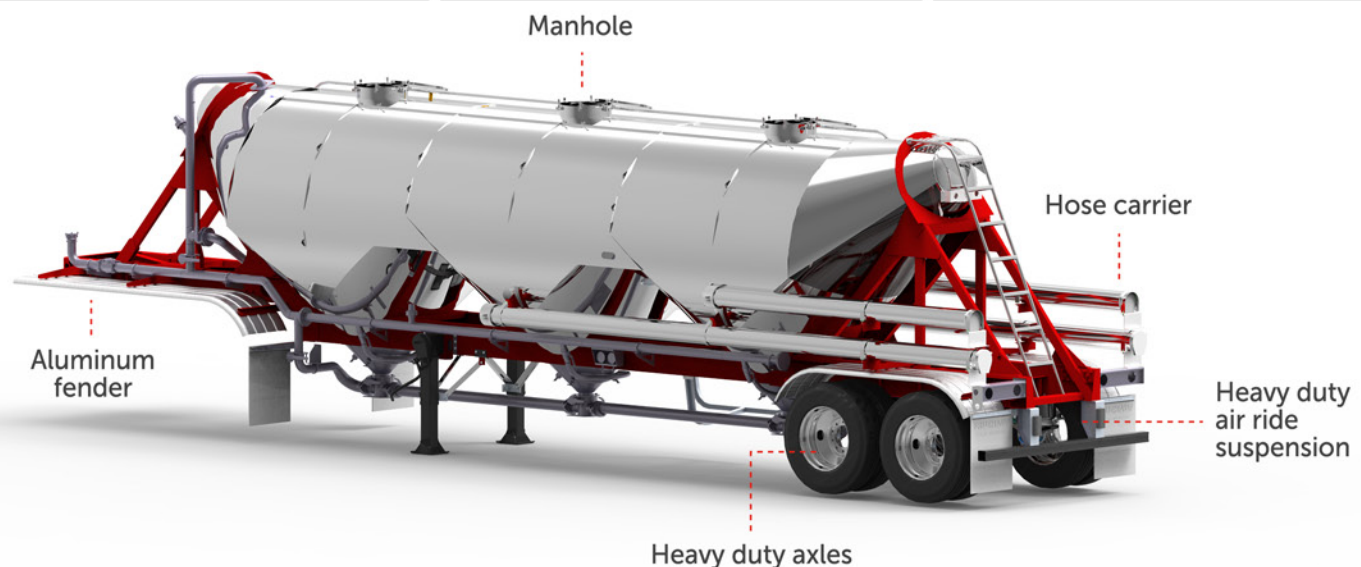

FRUEHAUF® equipment is designed to provide **real hauling solutions**